

**THE WARMEST GARAGE DOOR BY KRISPOL
VENTE K2 RFS 60 – ON SALES AS OF 11 JUNE!**

Dear Customers,

it is our great pleasure to present you the offer of garage door VENTE K2 RFS 60 – the warmest garage door made by KRISPOL. The door was first shown during this year edition of BUDMA fairs, attracting the attention of the media, our Business Partners and retail customers.



The collection VENTE K2 RFS 60 is a breakthrough in the development of our standard product range. This product is i.e. the effect of observing the development trends of modern construction industry which each time is more energy-efficient. To meet these trends we have prepared the offer which will **effectively encourage the Customers to visit your sales showroom**. As the leader of the innovative solutions in the area of technology and design, we want all the time to be as close as possible to our Partners and Customers and meet their needs. In order to achieve it **we have taken care to ensure that the warmest Krispol door are affordable to the widest group of your customers!**



DOORS • WINDOWS • SHUTTERS

WHAT ARE THE DISTINCTIVE FEATURES OF VENTE K2 RFS 60?




The essence of innovation are solid **garage panels with a shape protecting the fingers, the panels are 60 mm thick and have the U coefficient at the level 0,39 [W/m²K]**. This result is approximately 30% better than for 40 mm thick panels, what can be transferred into the coefficient at the level of **U=0,9 [W/m²K]** for the whole door (for the parameters: 5000x2500 mm). The panel has the same thickness of 60 mm along its all height – also in the place of joining the sections.

The secret of the warmest KRISPOL door is not only about the thicker panel. The door has also been equipped with strengthened system of sealings. This system includes **double sealing of the bottom panel**: double lip seal and additional single lip seal.

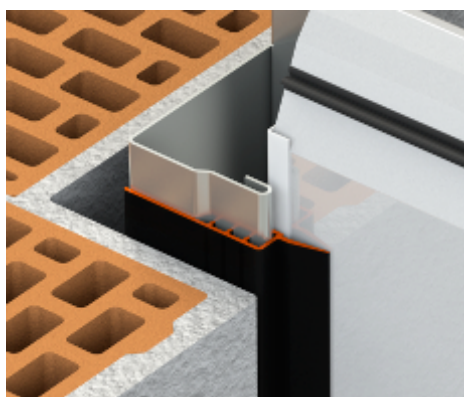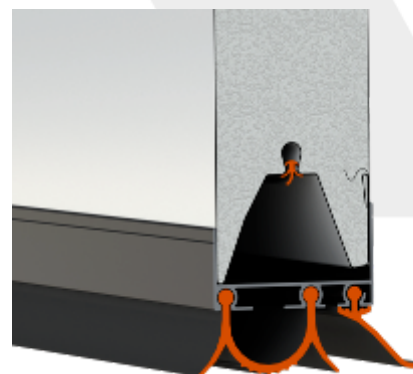

As a standard, the VENTE K2 RFS 60 doors have also **additional circumferential seal** (on the sides and on the top) of a special construction, which guarantees the reduction of thermal bridges between the wall and angles. In connection with extended bottom sealing and sealing between the sections, it guarantees a perfect quality of insulation of the whole door.

We have also applied the solution known from other KRISPOL doors – **the shape of the upper arch**. It has been designed to optimally press the upper panel of the gate to the lintel. It made the door even more sealed and safe. The leadtime for this type of the door is similar to the leadtime for standard doors and it takes approximately three weeks.

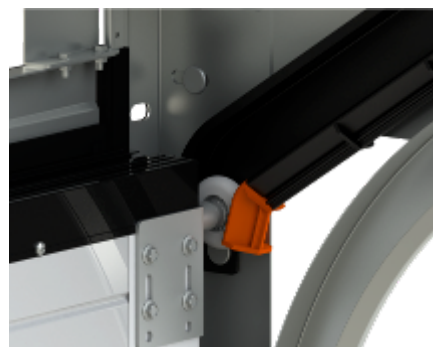

DOORS ■ WINDOWS ■ SHUTTERS

UNCOMPROMISED AESTHETICS



While developing the construction of the new door we did not forget about the uncompromised aesthetics, what has made us famous for years. The door VENTE K2 RFS 60 are made of plain, smart panels without embossing. The door is available in the whole colour offer of HOME products.



The Customers are given a choice of **more than 250 colours - 210 RAL colours and more than 40 veneers!** One of these colours is the unique Antique Pine, available exclusively at KRISPOL. Additionally, hardware elements are painted with the same colour as the internal colour of the panels. These elements have been painted so that each detail looked good, also from the interior of the garage.

DIMENSIONS, RAIL GUIDES AND DRIVES

The doors VENTE K2 RFS 60 are available **in the dimension that can change of 1 mm** and three types of rail guides are available: standard N28, higher standard NH35 and the low one – L15. The minimal required lintel is 150 mm. It gives huge possibilities of adapting the door to the Customer's needs. The housing conditions for the rail guides have been modified to suit the requirements of the new door, therefore we ask you to pay attention to the detail information put in the appendix of the price list.

The door offer includes **the full rail guides offer** according to the selection tables in the Price List of KRISPOL industrial doors. It means that the offer is varied both when it comes to the equipment and the price. The offer is adapted to different possibilities and expectations of the Customers.

The offer is also characterized by **simplicity of construction and assembly of KRISPOL doors** so known and appreciated by our Customers. This simplicity also extends to the new, more comfortable system of assembling the drive shaft.

ACCESSORIES AND SAFETY FEATURES



A wide offer of accessories also includes L60 window with triple glazing unit, a locker with the possibility of choosing the double sided deadlock, deadlock, as well as 21 designs of decorative details.

The standard equipment of VENTE K2 RFS 60 doors includes the protection in case the spring breaks, it is a safe construction of the panels, protection for the rollers, and an overload switch in the automatic doors.


THE DOOR VENTE K2 RFS 60 IN 3 WORDS – WARM, FUNCTIONAL AND BEAUTIFUL

- **60 mm thick panels at the whole height, with the coefficient of $U=0,39$ [W/m^2K]**
- **double sealing of the bottom panel and circumferential seal as the standard one**
- **offer of more than 250 colours – full RAL colour range and more than 40 veneers**
- **unlimited number of dimensions – changing every 1 mm**
- **3 types of rail guides – lintel from 150 mm**
- **flexible and wide offer of drives and accessories**
- **solid construction and simple installation**

We are attaching the appendix to the price list and we would like to get you familiar with the details of our exceptionally affordable and attractive offer of the warmest KRISPOL garage doors.

Yours sincerely

Tomasz Przychodniak

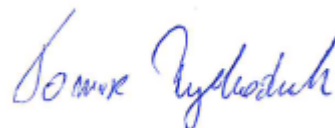

Product Manager

DOORS ■ WINDOWS ■ SHUTTERS